




Columna guía

G

Material: 1.7264
Dureza: 60-62 HRc
Forma de pedido:
G/ d₁ x L

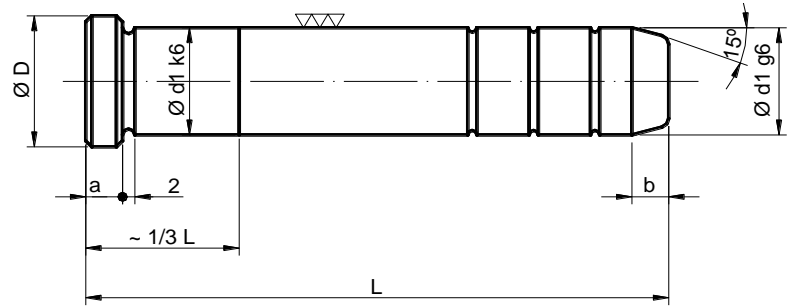

d ₁	D	a	b	L																																
				44	52	65	75	85	95	105	115	125	140	170	200	220	225	250	275	280	300	315	325	350	375	400										
10	12	4	3	•	•	•	•	•	•	•	•	•																								
12	15	4	4	•	•	•	•	•	•	•	•	•	•																							
14	17	5	4	•	•	•	•	•	•	•	•	•	•	•																						
16	19	6	5	•	•	•	•	•	•	•	•	•	•	•	•			•																		
18	22	6	6			•	•	•	•	•	•	•	•	•	•			•	•																	
20	24	7	6			•	•	•	•	•	•	•	•	•	•	•			•	•			•													
25	30	8	7				•	•	•	•	•	•	•	•	•	•			•	•		•	•	•				•								
30	35	10	8					•	•	•	•	•	•	•	•	•			•	•		•	•	•			•	•			•	•				
40	47	12	10										•	•	•			•	•	•		•	•			•	•	•	•			•	•			
50	58	15	12										•	•	•			•	•	•		•	•			•	•	•	•			•	•			